


# “ELLIPS” Security Systems

## SAFE ELLIPS

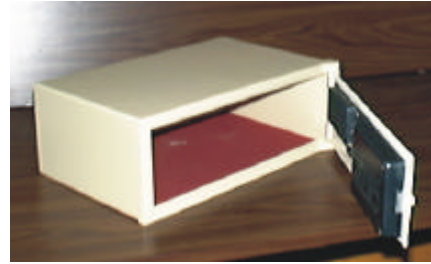

The Safe is meant for storage of valuables, business documentation etc in offices and hotel rooms.

- Service conditions – closed premises;
- current – 6V rechargeable battery;
- keypad is blocked after 4 inputs of wrong code;
- emergency opening with Master code;
- energy-independent memory;
- built-in piezo-element;
- low battery indicator;
- mechanical closure;
- all-metal Touch Pad;
- door: 5 mm steel with in-built keypad;
- dimensions: 430mm(W) x 310 mm(D) x 150 mm(L);
- range of temperature from -20°C to +50°C;
- weight: 14kg;

### Usage instructions:

- press the key - \* ;
- wait until red indicator stops signaling (working mode);
- type four-digit code while the indicator is lit (the code must be typed pausing between pressing separate buttons for no more than 8 seconds). If the buttons are not pressed within this frame of time sound signal is emitted and the Safe enters into standby state, the indicator dims, then one can repeat the operation if required;
- provided the input is correct, the lock opens (mechanical sound heard);
- pull the handle;
- code input is accompanied by sound signals;
- in case of a wrong input press the offset key - Õ and repeat the operation;

**Attention!** If the code is input incorrectly four times in row, then the Safe enters the blocking mode which lasts – 20 minutes.

- the door is closed by turning and pressing of the handle

### For changing the code it is needed to:

- press the key “X” (short sound signal);
- enter the old code (long sound signal);
- enter the new code (long sound signal);
- enter the new code (long sound signal). The safe is ready to work with the new code.

**Attention!** If the code is input incorrectly there must be three short signals. When the system is in working mode again, first repeat the action for changing the code!

Changes of indicator pulsing means that the batteries are to be changed (charged). If the door can not be opened due to the poor charged batteries, use “+ 6 V” in right. Change the batteries after the door is opened.

Republic of Armenia, 375014, Yerevan, 27, str. Tigranian Tel/fax: +(3741) 23-01-08, 23-01-07, 23-15-20, 23-57-69

E-mail: [info@sec.am](mailto:info@sec.am) , marketing dep. [sales@sec.am](mailto:sales@sec.am) URL: [www.sec.am](http://www.sec.am)